




Description: 5000*10mm, 5050SMD RGB LED, 60-LEDs/m, 12VDC, constant voltage, waterproof RGB flexible LED strip.

Product Name Flex Strip

Model R0060AQ-RGB

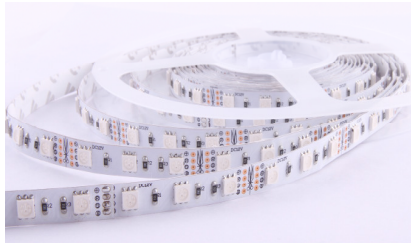

Applications

Suitable for cove, accent & contour lighting in channel letters, cabinets, disco, bandstand, hotel, shopping mall, home, etc...

Features

1. 5050SMD LED mounted.
2. Can be cut at the printed marks.
3. Certification: UL, CE ,RoHS.

Installation:

1. Easy installation with double-sided adhesive tape/silicone seal.
2. Minimum bending diameter is 5cm[1.96in].

Warranty: 3 years.

Optical and Electrical Parameters

P/N	LED Color	Color Wavelength(nm)	Beam Angle (°)	Luminous Flux (lm/m)	CRI	Luminous Efficacy (lm/W)	Working Voltage (VDC)	Working Current (mA)		Power (W)	
								1m [39.37in]	5m [196.85in]	1m [39.37in]	5m [196.85in]
R6060AQ	Red	620-625	115	120	--	--	12	1200	4000	14.4	48
	Green	525-530		180							
	Blue	465-470		60							

Additional Parameters

P/N	LED Color	Standard Length		Max. Length		LED Qty. (pcs/m)	Operating Temperature		Storage Temperature		IP Grade
		(m)	(FT)	(m)	(FT)		()	(°F)	()	(°F)	
R6060AQ	RGB	5	16.4	5	16.4	60	-25~+60	-13~140	-25~+70	-13~158	IP65

Profile Drawings

Unit:Zmm [in]

