



# Specifications

**Series Name:** 5050SMD FLEX

**Applications:**

**Model:** R6060AA

Suitable for cove and contour lighting in hotel, shopping mall, cabinets, halo lighting, shelving, window frame, etc....



**Features:**

1. High luminous efficacy 5050 SMD LED mounted.
2. Can be cut at the printed marks.
3. Certification: UL (UL file #E351381), RoHS.

**Installation:**

1. Easy installation with mounting clips.
2. Many installation and fixing options available with the minimum bending diameter as 5cm [1.97in].

**Warranty:** 3 years.

**Optoelectronic Parameters:**

P/N	LED Color	Color Temperature (K)	Beam Angle (°)	Luminous Flux (lm/m)	CRI	Luminous Efficacy (lm/W)	Working Voltage (V DC)	Working Current (mA)		Power (W)	
								1m [39.37in]	5m [196.85in]	1m [39.37in]	5m [196.85in]
R6060AA-UL	White	6000	120	423	≥75	42	12	1000	3333	12	40


**Others:**

P/N	LED Color	Standard Length		Max. Length		LED Qty (pcs/m)	Operating Temperature		Storage Temperature		IP Grade
		(m)	(in)	(m)	(in)		(°C)	(°F)	(°C)	(°F)	
R6060AA-UL	White	5	196.85	5	196.85	60	-40~+50	--40~122	-50~+60	-58~140	IP65

**Notes:**

- ① Testing environment temperature: 25±2°C [77±3.6°F];
- ② The above data are typical values; the actual data of each single product could differ from the typical values.  
The data subject to change without prior notice.

**Profile Drawing:**

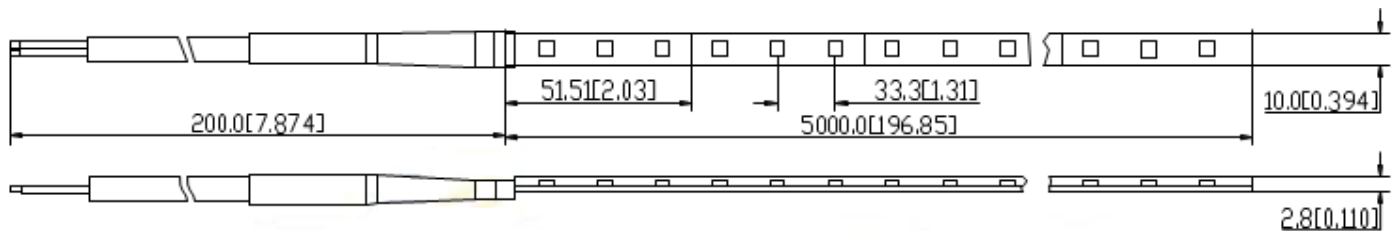

Unit: mm [in]