



Sign Lighting World
720-242-900
Sales@signLightingWorld.com
www.SignLightingWorld.com



S-1030-CW65



◆ Features


- ✧ Constant Current Technology, 50 pcs per series
- ✧ Exposed Aluminum plate for heat dissipation
- ✧ Injection molding process, water proof: IP 67
- ✧ High efficiency chip, high brightness and reliability
- ✧ Energy saving, environment friendly
- ✧ Long life span
- ✧ Suitable for channel letters and light boxes back lighting etc.



◆ Applications

- ✧ Channel letter lighting
- ✧ Commercial standing lighting
- ✧ Letter background lighting
- ✧ Light box lighting
- ✧ Logo lighting
- ✧ Line/shape lighting

◆ Dimensions

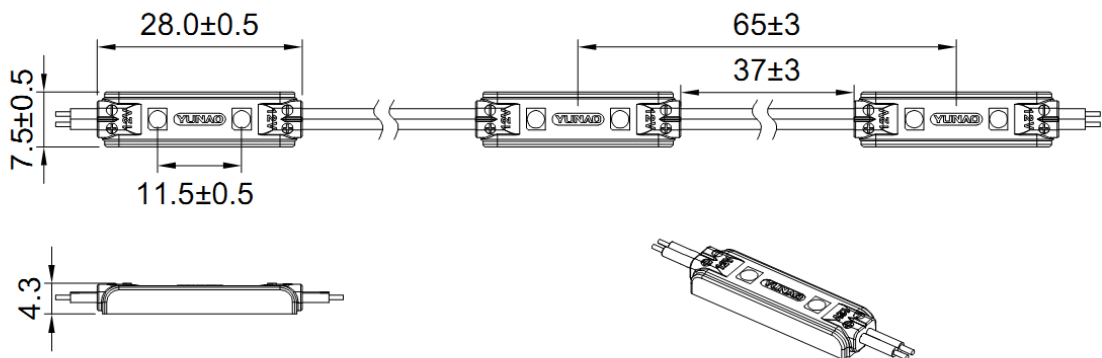


◆ Technical parameters

Item No.	LED	Color	C.C.T.	Luminous Flux	Angle
S-1030-CW65-MN	TOP3528	Red	620-630nm	3lm±10%	120°
S-1030-CW65-MN		Green	520-530nm	8lm±10%	
S-1030-CW65-MN		Blue	465-475nm	2lm±10%	
S-1030-CW65-MN		Yellow	585-595nm	2lm±10%	
S-1030-CW65-MN		WW	2800-3200K	15lm±10%	
S-1030-CW65-MN		NW	4000-4500K		
S-1030-CW65-MN		CW	9000-12000K		



◆ Distribution curve

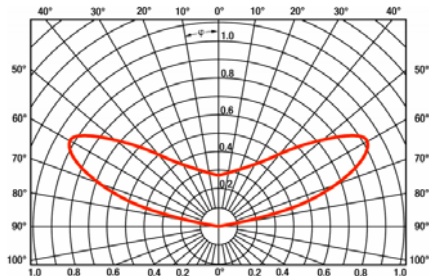

◆ Application Guide



◆ Attentions

No.	Item	Parameter
1	Drive method	Constant voltage drive
2	Input voltage	DC12V
3	Power (single module)	0.3W (typ)
4	LED QTY (single module)	2PCS
5	Max Connection Qty (PCS)	20(typ)
6	Cover color & material	Milky white PVC
7	Size	28*7.5*4.3mm
8	IP Level	IP65
9	Working temperature	-20~+60℃
10	Stock temperature	-40~+80℃
11	Warranty	3year/15000H
12	Weight (20pcs/chain)	30g