

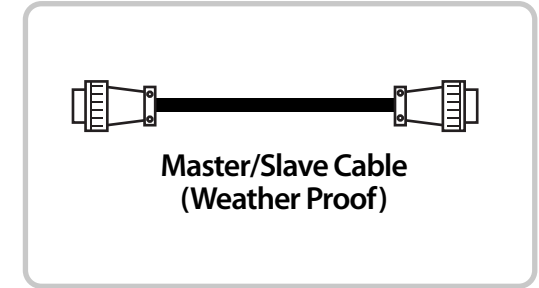



Double-Sided Setup

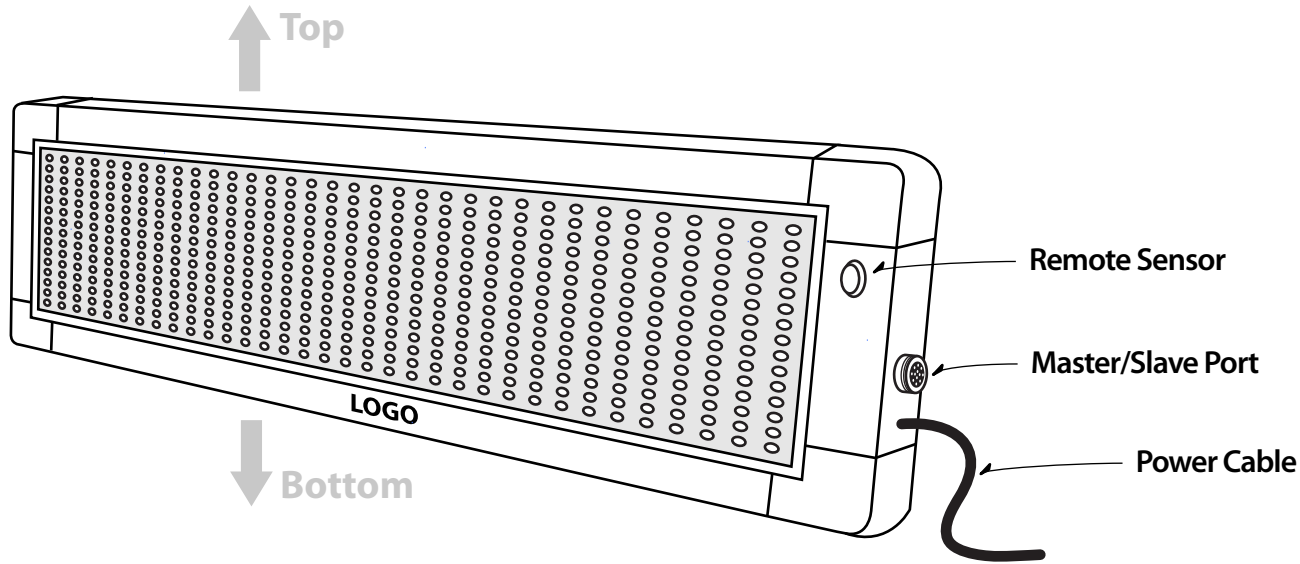

1 Align the pins and push firmly until the cable is perfectly connected.

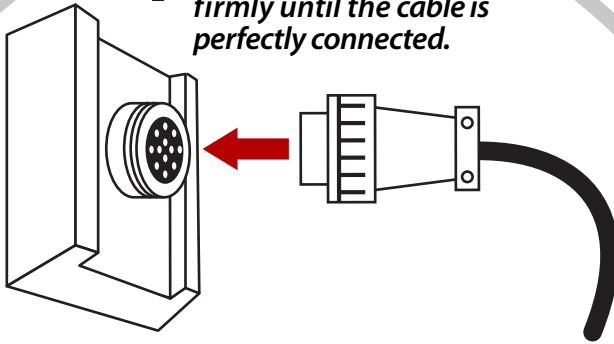

2 Turn the fastener until the cable is securely locked.
**Important for keeping water out.*

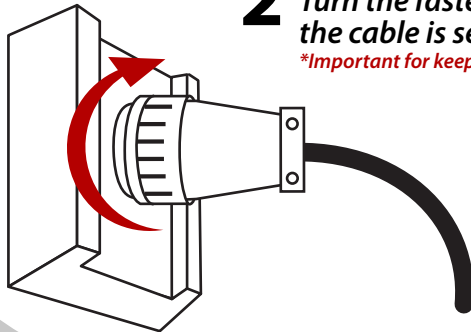

Master / Slave Configuration

Plug the Cable into the Master / Slave ports on both sides.

