



# 200W

Sign Lighting World, LLC  
www.SignLightingWorld.com  
720-242-9000  
sales@signlightingworld.com

# LED Power Supply



FG/  $\perp$  (Green)  
AC/N(White)  
AC/L(Black)  
+V(White)  
-V(Black)

## Features :

- Ip67 design for indoor or outdoor installations
- Protections: Short circuit / Overload/Over temperature
- Cooling by free air convection
- 100% full load burn-in test
- Suitable for LED lighting
- Products through CE, RoHS, UL Certification



# IP67 CE RoHS

## SPECIFICATION

MODEL					
OUTPUT	DC VOLTAGE	12V	24V		
	RATED CURRENT	16.7A	8.3A		
	CURRENT RANGE	0~16.7A	0~8.3A		
	RATED POWER	200W	200W		
	RIPPLE & NOISE (max.) <sup>NOTE 2</sup>	200mVP-P	350mVP-P		
	VOLTAGE TOLERANCE <sup>NOTE 3</sup>	±2%	±2%		
	LINEAR REGULATION	±1%	±1%		
	LOAD REGULATION	±2%	±2%		
INPUT	VOLTAGE RANGE	100~130VAC			
	FREQUENCY RANGE	50 ~ 60Hz			
	POWER FACTOR (Typ.)	PF>0.56/110VAC			
	EFFICIENCY (Typ.)	88%	88%		
	AC CURRENT (Typ.)	3.4A/110VAC			
	INRUSH CURRENT (Typ.)	COLD START 120A/110VAC			
PROTECTION	Short circuit	Protection type : recovers automatically after fault condition is removed			
	Overload	overload protected @ 110-130% above peak rating			
	Over temperature	Protection type : Shut down o/p voltage, re-power on to recover			
ENVIRONMENT	WORKING TEMP.	-30 ~ +50°C (Refer to output load derating curve)			
	WORKING HUMIDITY	20 ~ 99% RH non-condensing(Waterproof)			
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C , 10 ~ 99% RH			
SAFETY & EMC	SAFETY STANDARDS	CE Mark (LVD) , IP67			
	WITHSTAND VOLTAGE	I/P-O/P:1.5KVAC I/P-GND:1.5KVAC			
	EMC Test Standards	EN55015 : 2013;EN61547 : 2009; EN61000-3-2:2014; EN61000-3-3:2013			
NOTE	<p>1. All parameters NOT specially mentioned are measured at 110VAC input, rated load and 25°C of ambient temperature.</p> <p>2. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 10uf parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p>				




**200W**

Sign Lighting World, LLC  
 www.SignLightingWorld.com  
 720-242-9000  
 sales@signlightingworld.com

# LED Power Supply


## Mechanical Specification

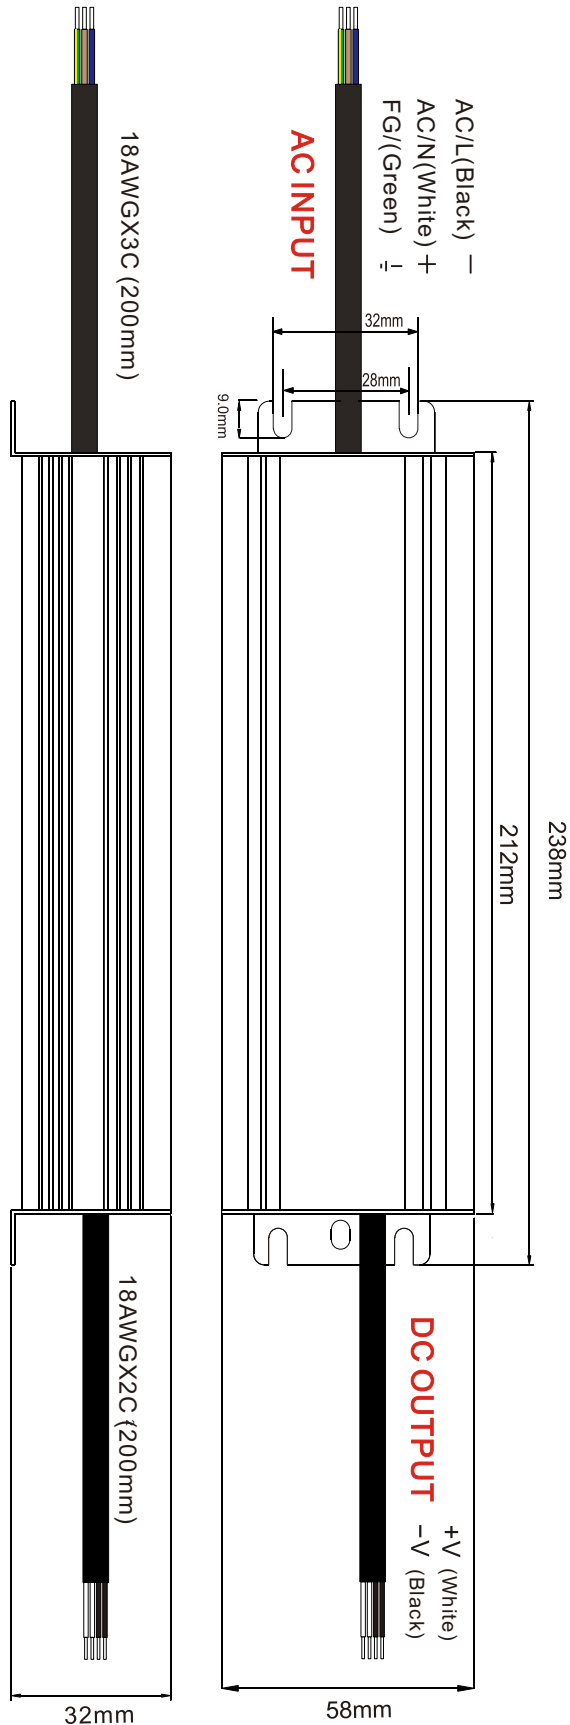

## Others

DIMENSION	238X58X32 (mm) (L×W×H)
CARTON QUANTITY	15 PCS/Carton
CARTON SIZE	398x268x158 (mm)
WEIGHT	1100g/pcs

## Derating Curve

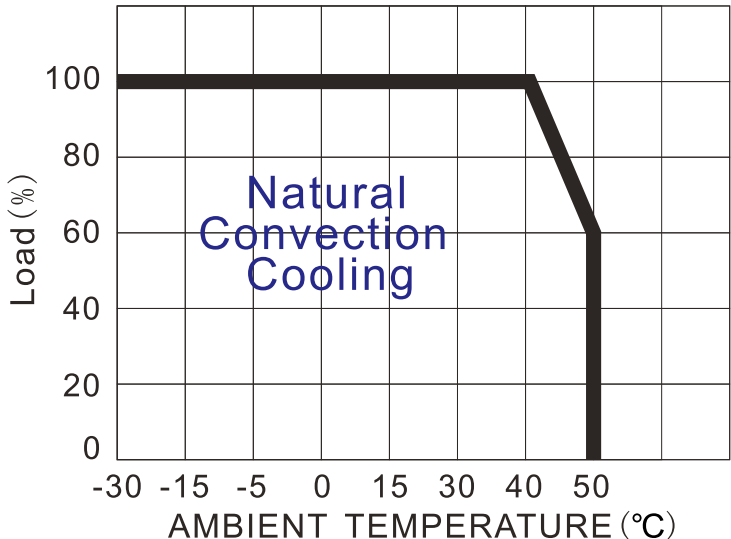

Unit:mm