

## DATA SHEET

# SLW602BA

3528SMD SLW LED<sup>®</sup> Modules Available in: White, Warm White, Red, Blue, Green, Amber, Orange

## **Product Features**

The SLW602BA is powered by an Epistar 3528 SMD LED chip, designed to produce high luminous efficacy. Built with overmolded housing and aluminum PCB, the SLW602BA was designed to last. Printed markings allow individual modules to be cut, while double-sided 3M adhesive tape found on the back of modules allows for easy installation.

	Model No.	SLW602BA-UL
Physical	Color	White
	Dimensions (length x width x height)	1" x 0.28" x 0.18"
	Color Temperature	6500K
	LED Chips / Module	2
	LED Modules / Foot	5
	LED Modules / String	50
	Operating Temperature	-13 ~ 140 °F
	Storage Temperature	-13 ~ 158 °F
	View Angle	115°
Electrical	Power Consumption	0.3 W
	Foward Voltage	12VDC
	Forward Current	25 mA
Output	Lumens / Module	16
	Lumens / Foot	80
Safety	Certification	UL, CE, RoHS
	Ingress Grade	IP65
	Warranty	3 years








# Product size: 30\*7\*4.7[1.18\*0.28\*0.18 in]

Unit:mm[in]

### Standard Cascade Dimension

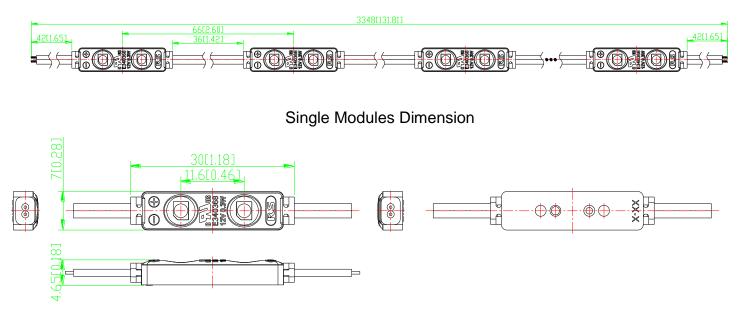

### Light intensity distribution:

